

Marlborough Square

Design concept




Item /feature	Description
1	Reduce speed limit through speed restriction zone and design features to slow speeds and communicate to drivers that they are in a shared environment, i.e. raised table, change in surface materials and narrowing to carriageway.
2	Narrower carriageway and removal of mini roundabout. Wider pavement. Channel blocks – Charcon ECO Countryside kerb. Removal of guard rails.
3	Charcon Andover Washed Flags – colour TBC.
4	Taxi rank – ability to increase capacity by designating central parking spaces for different uses/functions during different parts of the day.
5	Removal of raised surface and by-pass lane. New tree flush with main surface level.
6	Tighter corner, wider pavement (subject to tracking)
7	Removal of landscaped areas, replaced with flush surfacing and new trees. Removal of guard rails.
8	Clear zone to allow pedestrians to move across the square easily.
9	Extent of works
10	Cycle parking.
11	20 minute shopper bays. Eastern most bay can be coned off for hearses when required.
	Resurface with Charcon Andover Washed Flags (three shade mix to be confirmed but likely Silver Grey, Light Grey and Mid Grey, format 600x200).

This page is intentionally left blank

Memorial Square

Design concept

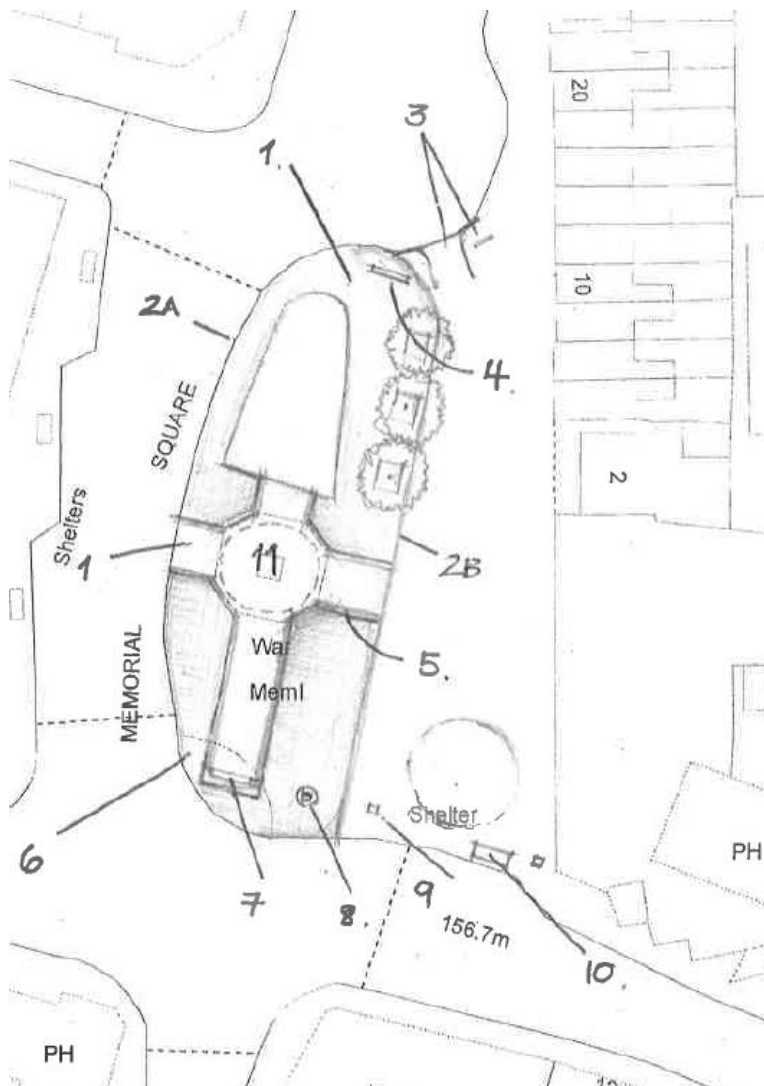

Item /feature	Description
1	Resurface with Charcon Andover Washed Flags (three shade mix to be confirmed but likely Silver Grey, Light Grey and Mid Grey, format 600x200).
2A	Charcon ECO Countryside Kerb – with raised profile kerb edge.
2B	Charcon ECO Countryside Kerb – laid flush.
3	Servicing access to be 'de-engineered' so as to look less like an 'exit arm' off the roundabout. High level post mount signage to be replaced by low level mounted signage.

4	Installation of granite slab etched with the words, 'Coalville' '1833' 'Ex terra opes' 'From the earth wealth' Plus extract of district shield. Flush uplighting.
5	Delineation material (flush) Andover Washed in Charcoal.
6	Removal of existing soft landscaped area. Relocation of decorative panels. Relocation of CCTV post. Relocation of traffic signal box (if possible).
7	Installation of granite slab etched with the words: South facing: To be confirmed. North facing: To be confirmed. Flush uplighting.
8	New flagpole with internal secure lanyard and gold cap. LED flush surface up-lighting to flagpole.
9	Granite blocks or other agreed feature to prevent vehicle access.
10	New, relocated bus shelter.
11	Installation of new energy efficient flood lighting. Installation of replacement corner wall mounted lanterns. Installation of new furniture to allow fixing of memorial wreaths around the four corners of the tower. <u>Additional works to be commissioned by NWLDC Conservation Officer:</u> <ul style="list-style-type: none"> - Structural works to tower and base. - Repair works to tower and base. - Removal of unauthorised fixtures. - Removal of unstable flagpole at top of tower (to be replaced by No.8).